

TUF STUF™

HIGH PERFORMANCE FLOORING



USN
009-26
COMPLIANT

WOODLAND PATH™

COMMERCIAL LUXURY VINYL PLANK FLOORING



WP57218
Verigated Green Ash



WP57516
Seaside Driftwood



WP57518
Sundried Driftwood



WP57111
Stormy Sea Driftwood



WP57014
Black Tupelo Gum



WP57216
Verigated White Ash



WP57295
Natural Ash




WP57201
Medium Choke Cherry




WP57801
Golden Oak



WP57915
Black Cherry Amber



WP57004
Wild Cherry

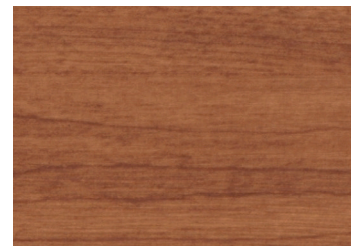


WP57803
Laurel Oak



WP57802
Santa Fe Oak




WP57116
Malacca Teak




WP57205
Cherrybark Oak




WP57812
Mountain Black Cherry




WP57051
Black Oak




WP57161
Warm Mahogany




WP57112
Santos Rosewood

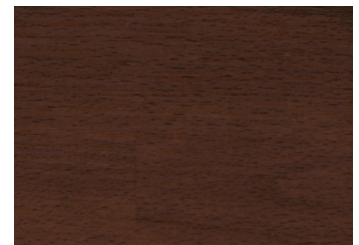

WP57006
Dark Boxelder



WP57313
Burr Oak



WP57099
Peacock Brown

TUF STUF™ WOODLAND PATH™

COMMERCIAL LUXURY VINYL PLANK FLOORING

TECHNICAL DATA

STANDARD SPECIFICATION	ASTM F1700
CLASSIFICATION	CLASS III TYPE B
DIMENSIONS	6" x 36" (36 sf/carton)
OVERALL THICKNESS	3.0 mm Non-Cushioned
WEAR LAYER THICKNESS	20 mils (0.5 mm)
WEAR LAYER COMPOSITION	Virgin PVC wear layer infused with CS TUF STUF Ultimate Performance Technology

FIRE SPECIFICATIONS

CRITICAL RADIANT FLUX	≥ 0.45 watts/cm ² NFPA Class I
SMOKE GENERATION	< 450 DM Corrected Pass
FLAME SPREAD/ SMOKE DEVELOPED	ASTM E84 Class C
FIRE TEST DATA	Complies with NFPA 99 & NFPA 101 Requirements

PERFORMANCE SPECIFICATIONS

ASTM F1700	Standard Specification for Solid Vinyl Floor Tile Exceeds Requirements
CHEMICAL RESISTANCE	Exceeds Requirements No Staining
DIMENSIONAL STABILITY	Exceeds Requirements Does not change linear dimension more than 0.020"/linear foot
FLEXIBILITY	Meets Requirements
STATIC LOAD LIMIT	Exceeds Requirements 1,500 psi at maximum limit
SLIP RESISTANCE	≥ 0.6 SCOF Complies with ADA Guidelines
ABRASION RESISTANCE	34,000 Cycles until design layer visibly affected
CHAIR CASTOR RESISTANCE	Phillips Roll Chair 3.5 @ 20,000 cycles
SCRATCH RESISTANCE	Sim Floor 4.5 out of 5.0
SOUND TRANSMISSION	IIC 48 with floor ceiling assembly
CA 01350 EMISSIONS TESTING	Meets Requirements
ANTIBACTERIAL	Antimicrobial agent incorporated into the wear layer which effectively inhibits bacterial growth on the flooring surface
RECYCLED CONTENT	67% Post-Consumer Recycled Content - 100% Recyclable After Use

PHILIP "P.J." HUGHES
Fed Gov / DoD / GSA Account Manager
SDVOSB GSA SCHEDULE • GS-27F-0036V
VAMC VIP Verified • www.vip.vetbiz.gov
CAGE Code: 4RRA8
PH: 937.829.8316
pjhughes@shannonspecialtyfloors.com



Schedule
GS-27F-0504H • GS-27F-0036V
GS-27F-0015V

